

Internal Combustion Pneumatic Tire Lift Trucks

Capacity: 3,000-7,000 lb



2P3000-2P7000 2PD4000-2PD7000

Operator Friendly

Tough environments require tough equipment. Cat® lift trucks are built for harsh, rugged applications, without sacrificing operator comfort and convenience. With an extensive list of premium standard features, the 2P3000-2P7000/2PD4000-2PD7000 Series is designed to get the job done.



Cat lift trucks set the standard for the ultimate lifting experience. Exceptional comfort, hardworking products you can depend on and industry-leading customer service make these lift trucks the only choice for your material handling needs.

The 2P3000-2P7000 / 2PD4000-2PD7000 models meet the strict Environmental Protection Agency (EPA) and California Air Resources Board (CARB) standards for carbon monoxide (CO), hydrocarbons (HC) and nitrogen oxide (NOx) emissions, while continuing to deliver the commanding performance you need. Manufactured in Houston, Texas, these lift trucks provide the productivity you expect and support from the industry's most trusted dealer network.



Model	Fuel Type	Rated Capacity (lb)	Displacement (liters)	
			Gasoline	Diesel
2P3000	Gas/LP	3,000	2.1	—
2P3500	Gas/LP	3,500	2.1	—
2PC4000	Gas/LP	4,000	2.1	—
2P4000 / 2PD4000	Gas/LP/Diesel	4,000	2.5	3.3
2P5000 / 2PD5000	Gas/LP/Diesel	5,000	2.5	3.3
2P5500 / 2PD5500	Gas/LP/Diesel	5,500	2.5	3.3
2P6000 / 2PD6000	Gas/LP/Diesel	6,000	2.5	3.3
2P6500 / 2PD6500	Gas/LP/Diesel	6,500	2.5	3.3
2P7000 / 2PD7000	Gas/LP/Diesel	7,000	2.5	3.3

Commanding Presence

In control and delivering results. Your Cat lift truck will help keep the operator comfortable and productive. Expect nothing less than powerful performance and exceptional productivity from these pneumatic tire lift trucks.



Comfortable Seating

Operators of varying sizes can work long shifts comfortably in the standard full-suspension seat. An optional swivel seat and rear grab handle with horn button is available for high-shuttle applications.

Exceptional Floor Space

The open floor area, thick rubber floor mat and through-the-floor pedal design improve overall operator comfort. Foot Direction Control is an option for those applications where single-pedal directional control is preferred.



Adjustable seating for increased comfort



Ample leg room to change positions



Premium Display Panel

The standard premium LED/LCD display panel provides a number of productivity-enhancing tools for the operator. Features such as an operator passcode system and maintenance interval reminders help ensure that the truck is running at peak performance.

Optimized Visibility

Narrow mast channels and open overhead guards help improve operator visibility to the load and surroundings. Standard LED work lights illuminate the work area while providing significant maintenance savings over traditional halogen or incandescent lights.

Consider The Options

A wide variety of options are available to customize the truck for operator preference or premium comfort, including fingertip hydraulic controls, swing-down LP tank bracket and awareness enhancement packages.



Display panel helps raise awareness



Enhanced visibility



Control at your fingertips

RELIABILITY

Step Up In Power

These trucks aren't built to sit on the sidelines. You can count on the 2P3000-2P7000 / 2PD4000-2PD7000 Series internal combustion pneumatic tire lift trucks to deliver top performance throughout the shift.



Environmentally-Friendly Engines

The gas/LP gas K21, K25 and diesel S4S purePOWER® engines can work in the toughest conditions, while offering excellent fuel economy. The standard engine protection system monitors performance on the gas / LP gas trucks.



Increased fuel efficiency, lower emissions

Serviceability

With display-based service indicators and reminders along with easy access to service components, you can count on maximizing uptime and lowering maintenance costs with your Cat lift truck.



Service time is minimized



Premium Standard Features

This truck contains a number of features designed to protect your investment and lower your cost of ownership, including ground speed control, Fuel Saver Mode, engine protection system, LED work lights and an underbelly screen.

Application Options

Options such as foundry and brick protection and specialty tires can customize the truck for your specific application needs, extending equipment life and minimizing product damage. The additional corrugated square fin radiator option is included in the cotton fiber protection package for dust and fiber applications. This feature is proven to be more efficient in heat transfer than traditional plate fin radiators.



LED lights



Specialty tires



Solutions for your application

CUSTOMER SERVICE

Best Warranty In The Industry

We stand behind our products, giving you peace of mind by helping your trucks stay on the job, day after day. Every new Cat lift truck is covered by a 2-year/unlimited hours warranty that includes parts and labor regardless of service hours. All components and systems are covered. With our standard 3-year/6,000 hours extended powertrain warranty, you'll have the confidence that only comes from owning a Cat lift truck.



Free Loaner Service Guarantee*

If your lift truck is not repaired right the first time or within the quoted time, you will receive a free loaner truck while the repair is completed.

Parts Fast Or Parts Free*

The Parts Fast Or Parts Free Guarantee ensures next-business-day delivery of parts for all brands of lift trucks, or they're free, including freight. If your part doesn't come in by the next business day, we pay for it.



Guaranteed to keep you moving



Parts for all brands of lift trucks



Flexible Financing Options*

Financing your next Cat lift truck is easy with our wide range of flexible leasing and purchasing options. Whether you want to finance or lease, your local Cat lift truck dealer can help customize a package tailored to your specific needs.



Custom financing packages

Dealers You Can Depend On

With hundreds of dealer locations throughout North and South America, Cat lift truck dealers provide more than just lift trucks. From flexible financing options, parts, service and product support, our dealers are unsurpassed.



Professionals you can depend on

Free Planned Maintenance*

Proper maintenance of your truck helps assure top performance over the long haul. That's why every new Cat lift truck gets its first planned maintenance completed by your local Cat lift truck dealer at no cost to you.



Quality service at the right price

* Programs may be subject to change without notice and may vary by region. Please ask your local Cat lift truck dealer for complete terms and conditions.

Specifications


Characteristics				2P3000		2P3500		2PC4000			
1	Capacity	at rated load center	lb	kg	3,000	1,500	3,500	1,750	4,000	2,000	
2		at load center – distance	in	mm	24	500	24	500	24	500	
3	Power	electric, diesel, gasoline, LP gas			gasoline / LP gas		gasoline / LP gas		gasoline/ LP gas		
4	Tire type	cushion, pneumatic			pneumatic		pneumatic		pneumatic		
5	Wheels (x=driven)	number front / rear			2x / 2		2x / 2		2x / 2		
Dimensions				2P3000		2P3500		2PC4000			
11	Lift with standard two-stage mast	maximum fork height	in	mm	130	3,300	130	3,300	131	3,330	
12		free fork height	in	mm	4.5	115	4.5	115	4.7	120	
13	Forks	thickness x length x width	in	mm	1.4 x 4 x 42	35 x 100 x 1,070	1.4 x 4 x 42	35 x 100 x 1,070	1.6 x 4 x 42	40 x 100 x 1,070	
	Fork spacing	out-to-out minimum / maximum	in	mm	7.9 / 36.2	200 / 920	7.9 / 36.2	200 / 920	7.9 / 36.2	200 / 920	
14	Tilt	forward / backward	deg		6° / 10°		6° / 10°		6° / 10°		
15-20	Overall dimensions	length to fork face	in	mm	89	2,260	90	2,295	92	2,350	
		width	with standard tires	in	mm	42	1,070	42.0	1,070	42.0	1,070
			with optional duals	in	mm	N/A		N/A		N/A	
		height	with lowered mast	in	mm	84.5	2,150	84.5	2,150	84.5	2,150
			seat height	in	mm	43.5	1,105	43.5	1,100	43.8	1,110
			to top of overhead guard	in	mm	82.5	2,100	82.5	2,100	83	2,105
with extended mast	in		mm	180	4,570	180	4,570	180	4,570		
21	Minimum outside turning radius	in	mm	76.8	1,950	78.0	1,980	79.5	2,020		
22	Load moment constant	in	mm	15.7	400	15.7	400	16.3	415		
23	Minimum aisle – 90° stack – zero clearance without load	in	mm	92.5	2,350	93.7	2,380	95.8	2,435		
Performance				2P3000		2P3500		2PC4000			
40-42	Speeds	travel loaded / empty	mph	km/h	11.0 / 12.0	17.5 / 19.0	11.0 / 11.5	17.5 / 19.0	11.0 / 11.5	18.0 / 18.5	
		lift speed loaded / empty	fpm	mm/s	120 / 125	620 / 630	120 / 125	620 / 630	125 / 130	620 / 630	
		lowering speed loaded / empty	fpm	mm/s	98 / 98	500 / 500	98 / 98	500 / 500	98 / 98	500 / 500	
43	Drawbar pull	loaded (60 min. rating)	lb	N	3,749	16,677	3,749	16,677	3,639	16,187	
		loaded maximum (5 min. rating)	lb	N	3,970	17,658	4,367	19,424	4,234	18,835	
44	Gradeability	loaded at 1 mph (1.6 km)	%		47.4		41.7		35.1		
		maximum loaded / empty	%		38.8 / 18.2		38.5 / 15.9		38.0 / 14.3		
Weight				2P3000		2P3500		2PC4000			
50	Empty		lb	kg	5,650	2,560	6,070	2,750	6,750	3,040	
51	Axle load	with rated load front / rear (est.)	lb	kg	7,710 / 940	3,620 / 440	8,460 / 1,110	3,980 / 520	9,370 / 1,380	4,390 / 650	
		without load front / rear (est.)	lb	kg	2,490 / 3,160	1,130 / 1,430	2,370 / 3,700	1,080 / 1,670	2,390 / 4,360	1,080 / 1,960	
Chassis				2P3000		2P3500		2PC4000			
60-61	Tire size	front, standard	in		6.50x10-10PR		6.50x10-10PR		6.50x10 / 5.00 Solid		
		front, optional duals	in		N/A		N/A		N/A		
		rear	in		5.0 x 8-8PR		5.0 x 8-8PR		5.00 x 8 / 3.00 Solid		
62	Wheel base	in	mm	55.0	1,400	55.0	1,400	55.0	1,400		
63-64	Tread width	front, standard tires	in	mm	35.0	890	35.0	890	35.0	890	
		front, optional duals	in	mm	N/A		N/A		N/A		
		rear tires	in	mm	35.5	900	35.5	900	35.5	900	
65-66	Ground clearance	at lowest point at mast	in	mm	4.3	110	4.3	110	4.3	110	
		at center of wheel base	in	mm	6.0	152	6.0	152	6.0	152	
67-68	Brakes	service	type		foot-operated, hydraulic		foot-operated, hydraulic		foot-operated, hydraulic		
parking		type		hand-operated, mechanical		hand-operated, mechanical		hand-operated, mechanical			
Electrical				2P3000		2P3500		2PC4000			
80	Engine	model			K21		K21		K21		
81		continuous output S.A.E. gross	HP	kW	53	39.6	53	39.6	53	39.6	
			at r.p.m.	2,700		2,700		2,700			
82		maximum torque S.A.E. gross	lb-ft	Nm	110	151	110	151	110	151	
			at r.p.m.	2,000		2,000		2,000			
83	cylinder / displacement	cu in	L	126	2.1	126	2.1	126	2.1		
84-85	Transmission	type			Powershift		Powershift		Powershift		
number of speeds forward / reverse				1 / 1		1 / 1		1 / 1			
86	Relief pressure	for attachments at main	psi	bar	2,625	181	2,625	181	2,625	181	
87	Noise level	mean value at operator's ear Leq	dB(A)		73.5		73.5		73.5		

NOTE: These specifications assume the use of drive axles, tires and tilt angles specified. Any modification to specifications, or any other combination of specifications made after the shipment of the truck, requires prior written approval from Mitsubishi Caterpillar Forklift America Inc. (MCFA). (See ANSI/ITSDF B56.1.) Also be advised that overall operating visibility may be affected by the mast configuration and mast options of your truck. Therefore, you may need to add ancillary [auxiliary] devices or modify your operating practices. Consult your dealer for further information.

2P4000		2PD4000		2P5000		2PD5000		2P5500		2PD5500	
4,000	2,000	4,000	2,000	5,000	2,500	5,000	2,500	5,500	2,750	5,500	2,750
24	500	24	500	24	500	24	500	24	500	24	500
gasoline / LP gas		diesel		gasoline / LP gas		diesel		gasoline / LP gas		diesel	
pneumatic		pneumatic		pneumatic		pneumatic		pneumatic		pneumatic	
2x / 2		2x / 2		2x / 2		2x / 2		2x / 2		2x / 2	
2P4000		2PD4000		2P5000		2PD5000		2P5500		2PD5500	
131	3,330	131	3,330	131	3,330	131	3,330	131	3,330	131	3,330
5.5	140	5.5	140	5.7	140	5.7	140	5.9	150	5.9	150
1.6 x 4 x 42	40 x 100 x 1,070	1.6 x 4 x 42	40 x 100 x 1,070	1.6 x 4 x 42	40 x 100 x 1,070	1.6 x 4 x 42	40 x 100 x 1,070	1.8 x 5 x 42	45 x 125 x 1,070	1.8 x 5 x 42	45 x 125 x 1,070
8.7 / 39.4	220 / 1,000	8.7 / 39.4	220 / 1,000	8.7 / 39.4	220 / 1,000	8.7 / 39.4	220 / 1,000	9.8 / 39.4	250 / 1,000	9.8 / 39.4	250 / 1,000
6° / 10°		6° / 10°		6° / 10°		6° / 10°		6° / 10°		6° / 10°	
98	2,490	98	2,490	100	2,550	100	2,550	104	2,645	104	2,645
45.5	1,160	45.5	1,160	45.5	1,160	45.5	1,160	50.0	1,270	50.0	1,270
64.5	1,640	64.5	1,640	64.5	1,640	64.5	1,640	67.5	1,710	67.5	1,710
84.5	2,150	84.5	2,150	84.5	2,150	84.5	2,150	85.5	2,170	85.5	2,170
43.8	1,110	43.8	1,110	45.8	1,160	45.8	1,160	45.8	1,160	45.8	1,160
83	2,105	83	2,105	83	2,105	83	2,105	83	2,105	84	2,125
180	4,570	180	4,570	180	4,570	180	4,570	180	4,570	180	4,570
86.5	2,200	86.5	2,200	87.8	2,230	87.8	2,230	91.1	2,315	91.1	2,315
17.9	454	17.9	454	18.1	459	18.1	459	19.5	495	19.5	495
104.4	2,654	104.4	2,654	105.9	2,689	105.9	2,689	110.6	2,810	110.6	2,810
2P4000		2PD4000		2P5000		2PD5000		2P5500		2PD5500	
10.0 / 11.0	18.0 / 18.5	10.5 / 11.5	16.5 / 18.0	10.0 / 11.0	17.0 / 18.5	10.5 / 11.0	16.5 / 17.5	10.5 / 11.0	17.0 / 18.0	10.0 / 11.0	16.0 / 17.5
125 / 130	630 / 650	120 / 125	610 / 640	125 / 130	630 / 650	120 / 125	610 / 640	99 / 100	500 / 520	96 / 100	490 / 510
98 / 98	500 / 500	98 / 98	500 / 500	98 / 98	500 / 500	98 / 98	500 / 500	98 / 98	500 / 500	98 / 98	500 / 500
3,705	16,481	3,992	17,756	3,705	16,481	3,948	17,560	4,058	18,050	3,881	17,266
4,234	18,835	4,477	19,914	4,345	19,326	4,411	19,620	4,742	21,092	4,367	19,424
33.6		35.6		28.7		30.2		28.1		26.2	
39.1 / 18.5		40.4 / 18.7		39.8 / 16.5		40.4 / 16.4		39.6 / 16.7		40.4 / 16.9	
2P4000		2PD4000		2P5000		2PD5000		2P5500		2PD5500	
7,370	3,340	7,610	3,450	7,990	3,620	8,210	3,720	9,090	4,120	9,330	4,230
9,950 / 1,420	4,660 / 685	10,060 / 1,550	4,720 / 730	11,570 / 1,420	5,450 / 670	11,650 / 1,560	5,490 / 730	12,950 / 1,640	6,100 / 770	13,050 / 1,780	6,150 / 830
3,240 / 4,130	1,470 / 1,870	3,340 / 4,270	1,510 / 1,940	3,190 / 4,800	1,440 / 2,180	3,260 / 4,950	1,480 / 2,240	3,670 / 5,420	1,660 / 2,460	3,730 / 5,600	1,690 / 2,540
2P4000		2PD4000		2P5000		2PD5000		2P5500		2PD5500	
70x12-12PR		70x12-12PR		70x12-12PR		70x12-12PR		28x9-15-12PR		28x9-15-12PR	
70x12-12PR		70x12-12PR		70 x 12-12PR		70 x 12-12PR		28 x 9 x 15-12PR		28 x 9-15-12PR	
6.00 x 9-10PR		6.00 x 9-10PR		6.00 x 9-10PR		6.00 x 9-10PR		6.50 x 10-10PR		6.50 x 10-10PR	
63.0	1,600	63.0	1,600	63.0	1,600	63.0	1,600	63.8	1,620	63.8	1,620
38.0	970	38.0	970	38.0	970	38.0	970	42.0	1,070	42.0	1,070
47.5	1,210	47.5	1,210	47.5	1,210	47.5	1,210	47.5	1,210	47.5	1,210
38.5	980	38.5	980	38.5	980	38.5	980	38.5	980	38.5	980
4.6	117	4.6	117	4.6	117	4.6	117	5.4	136	5.4	136
6.6	167	6.6	167	6.6	167	6.6	167	7.4	189	7.4	189
foot-operated, hydraulic		foot-operated, hydraulic		foot-operated, hydraulic		foot-operated, hydraulic		foot-operated, hydraulic		foot-operated, hydraulic	
hand-operated, mechanical		hand-operated, mechanical		hand-operated, mechanical		hand-operated, mechanical		hand-operated, mechanical		hand-operated, mechanical	
2P4000		2PD4000		2P5000		2PD5000		2P5500		2PD5500	
K25		S4S		K25		S4S		K25		S4S	
61	45.8	51	38.5	61	45.8	51	38.5	61	45.8	51	38.5
2,700		2,250		2,700		2,250		2,700		2,250	
129	186	134	185	129	186	134	185	129	186	134	185
1,600		1,800		1,600		1,800		1,600		1,800	
152	2.5	203	3.3	152	2.5	203	3.3	152	2.5	203	3.3
Powershift		Powershift		Powershift		Powershift		Powershift		Powershift	
1 / 1		1 / 1		1 / 1		1 / 1		1 / 1		1 / 1	
2,625	181	2,625	181	2,625	181	2,625	181	2,625	181	2,625	181
76.5		75.5		76.5		75.5		76.5		75.5	

2P6000		2PD6000		2P6500		2PD6500		2P7000		2PD7000	
6,000	3,000	6,000	3,000	6,500	3,250	6,500	3,250	7,000	3,500	7,000	3,500
24	500	24	500	24	500	24	500	24	500	24	500
gasoline / LP gas		diesel		gasoline / LP gas		diesel		gasoline / LP gas		diesel	
pneumatic		pneumatic		pneumatic		pneumatic		pneumatic		pneumatic	
2x / 2		2x / 2		2x / 2		2x / 2		2x / 2		2x / 2	
2P6000		2PD6000		2P6500		2PD6500		2P7000		2PD7000	
130	3,300	130	3,300	131	3,330	131	3,330	131	3,330	131	3,330
5.9	150	5.9	150	5.9	150	5.9	150	5.9	150	5.9	150
1.8 x 5 x 42	45 x 125 x 1,070	1.8 x 5 x 42	45 x 125 x 1,070	2 x 5 x 42	50 x 125 x 1,070	2 x 5 x 42	50 x 125 x 1,070	2 x 5 x 42	50 x 125 x 1,070	2 x 5 x 42	50 x 125 x 1,070
9.8 / 39.4	250 / 1,000	9.8 / 39.4	250 / 1,000	9.8 / 39.4	250 / 1,000	9.8 / 39.4	250 / 1,000	9.8 / 39.4	250 / 1,000	9.8 / 39.4	250 / 1,000
6° / 10°		6° / 10°		6° / 10°		6° / 10°		6° / 10°		6° / 10°	
107	2,720	107	2,720	108	2,750	108	2,750	110	2,790	110	2,790
50.0	1,270	50.0	1,270	50.0	1,270	50.0	1,270	51.0	1,300	51.0	1,300
67.5	1,710	67.5	1,710	67.5	1,710	67.5	1,710	67.5	1,710	67.5	1,710
85.5	2,170	85.5	2,170	85.5	2,170	85.5	2,170	91.0	2,310	91.0	2,310
47.7	1,210	47.7	1,210	47.7	1,210	47.7	1,210	47.7	1,210	47.7	1,210
84	2,125	84	2,125	84	2,125	84	2,125	84.5	2,140	84.5	2,140
179	4,550	179	4,550	180	4,570	180	4,570	180	4,570	180	4,570
93.7	2,380	93.7	2,380	96.0	2,440	96.0	2,440	96.0	2,440	96.0	2,440
19.5	495	19.5	495	19.3	490	19.3	490	19.5	495	19.5	495
113.2	2,875	113.2	2,875	115.3	2,930	115.3	2,930	115.5	2,935	115.5	2,935
2P6000		2PD6000		2P6500		2PD6500		2P7000		2PD7000	
10.5 / 11.0	17.0 / 18.0	10.0 / 11.0	16.0 / 17.0	11.0 / 11.5	17.5 / 18.5	10.5 / 11.5	16.5 / 18.0	11.0 / 11.5	17.5 / 18.5	11.0 / 11.5	16.5 / 18.0
99 / 100	500 / 520	96 / 100	490 / 510	99 / 100	500 / 520	96 / 100	490 / 510	83 / 86	420 / 440	80 / 85	410 / 430
98 / 98	500 / 500	98 / 98	500 / 500	98 / 98	500 / 500	98 / 98	500 / 500	98 / 98	500 / 500	98 / 98	500 / 500
4,058	18,050	3,859	17,168	3,975	17,680	3,700	16,460	3,837	17,069	3,683	16,383
4,742	21,092	4,345	19,326	4,500	20,020	4,134	18,390	4,455	19,816	4,102	18,247
26.4		24.5		19.1		20.6		21.9		20.6	
40.3 / 17.1		41.1 / 17.3		40.9 / 14.8		40.6 / 14.9		39.7 / 14.6		40.6 / 14.9	
2P6000		2PD6000		2P6500		2PD6500		2P7000		2PD7000	
9,400	4,260	9,640	4,370	10,150	4,600	10,390	4,710	10,340	4,690	10,590	4,800
13,790 / 1,610	6,390 / 870	13,890 / 1,750	6,550 / 820	14,590 / 2,060	6,880 / 970	14,700 / 2,190	6,920 / 1,040	15,400 / 1,990	7,250 / 940	15,500 / 2,130	7,300 / 1,000
3,860 / 5,540	1,700 / 2,560	3,920 / 5,720	1,770 / 2,600	3,790 / 6,360	1,710 / 2,890	3,890 / 6,500	1,760 / 2,950	3,700 / 6,640	1,680 / 3,010	3,820 / 6,770	1,730 / 3,070
2P6000		2PD6000		2P6500		2PD6500		2P7000		2PD7000	
28x9-15-12PR		28x9-15-12PR		250x15-12PR		250x15-12PR		250x15-12PR		250x15-12PR	
28 x 9-15-12PR		28 x 9-15-12PR		28 x 9-15-12PR		28 x 9-15-12PR		28 x 9-15-12PR		28 x 9-15-12PR	
6.50 x 10-10PR		6.50 x 10-10PR		6.50 x 10-10PR		6.50 x 10-10PR		6.50 x 10-12PR		6.50 x 10-12PR	
67.0	1,700	67.0	1,700	67.0	1,700	67.0	1,700	67.0	1,700	67.0	1,700
42.0	1,070	42.0	1,070	42.0	1,070	42.0	1,070	42.0	1,070	42.0	1,070
47.5	1,210	47.5	1,210	47.5	1,210	47.5	1,210	47.5	1,210	47.5	1,210
38.5	980	38.5	980	38.5	980	38.5	980	38.5	980	38.5	980
5.4	136	5.4	136	5.4	140	5.4	140	5.4	146	5.4	146
7.4	189	7.4	189	7.0	180	7.0	180	7.0	180	7.0	180
foot-operated, hydraulic		foot-operated, hydraulic		foot-operated, hydraulic		foot-operated, hydraulic		foot-operated, hydraulic		foot-operated, hydraulic	
hand-operated, mechanical		hand-operated, mechanical		hand-operated, mechanical		hand-operated, mechanical		hand-operated, mechanical		hand-operated, mechanical	
2P6000		2PD6000		2P6500		2PD6500		2P7000		2PD7000	
K25		S4S		K25		S4S		K25		S4S	
61	45.8	51	38.5	61	45.8	51	38.5	61	45.8	51	38.5
2,700		2,250		2,700		2,250		2,700		2,250	
129	186	134	185	129	186	134	185	129	186	134	185
1,600		1,800		1,600		1,800		1,600		1,800	
152	2.5	203	3.3	152	2.5	203	3.3	152	2.5	203	3.3
Powershift		Powershift		Powershift		Powershift		Powershift		Powershift	
1 / 1		1 / 1		1 / 1		1 / 1		1 / 1		1 / 1	
2,625	181	2,625	181	2,625	181	2,625	181	2,625	181	2,625	181
76.5		75.5		76.5		75.5		76.5		75.5	

Call-out numbers shown in the diagram correspond to the first column of the specifications chart.

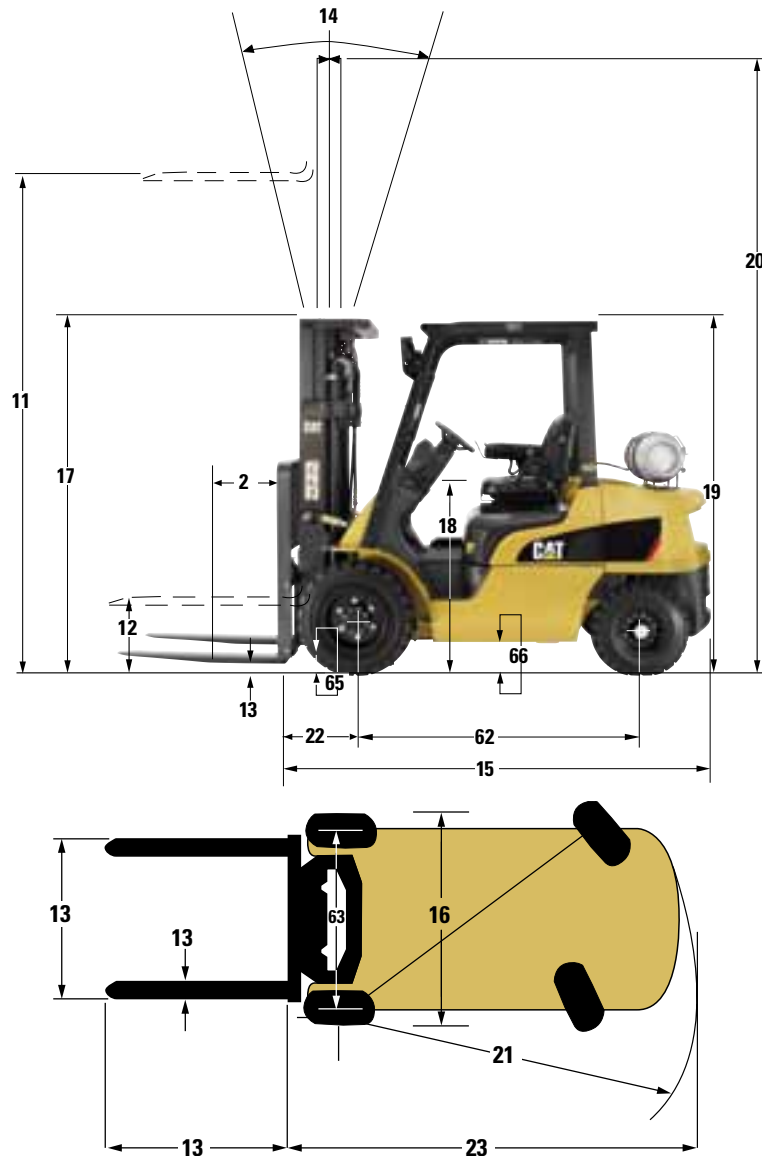

Safety Standards

These trucks meet American National Standards Institute/Industrial Truck Standards Development Foundation, ANSI/ITSDF B56.1.

UL-Classified by Underwriters Laboratories, Inc., as to fire and electric shock hazard only. Availability: Types G, LP and D standard. Types GS, LPS and DS optional. Users should be aware of, and adhere to, applicable codes and regulations regarding operator training, use, operation, and maintenance of powered industrial trucks, including:

- ANSI/ITSDF B56.1.
- NFPA 505, fire safety standard for powered industrial trucks — type designations, areas of use, maintenance and operation.
- Occupational Safety and Health Administration (OSHA) regulations that may apply.

Contact your Cat lift truck dealer for further information, including operator training programs and auxiliary visual and audible warning systems, fire extinguishers, etc., as available for specific user applications and requirements. Specifications, equipment, technical data, photos and illustrations based on information at time of printing and subject to change without notice. Some products may be shown with optional equipment.



Quality

Reliability

Customer Service

Experienced professionals at our dealerships and on our National Accounts Team can assist you with your lift truck purchase or lease. Your Cat lift truck dealer can provide options and additional visual and audible warning devices geared toward your specific requirements. Operator training programs are also available to boost productivity and to help reduce the potential for product damage and personal injury.



Internal Combustion Pneumatic Tire Lift Trucks

Capacity: 3,000-7,000 lb

1-800-CAT-LIFT | www.cat-lift.com

Copyright © 2010 by MCFA. All rights reserved. CAT, CATERPILLAR, their respective logos, "Caterpillar Yellow" and the "Power Edge" trade dress, as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission. All registered trademarks are the property of their respective owners. Some products may be shown with optional equipment. Printed in U.S.A.

CECV0019-01

09/10

CAT® Lift Trucks