

# XL HYDRAULIC DETACHABLE GOOSENECK



XL 150 Hydraulic Detachable Gooseneck 3+3+3 beam deck

## YOUR SOLUTIONS-BASED HAULING PARTNER



XL 2 Axle Booster

### SUPERIOR VERSATILITY

7 position variable ride height makes hooking up to the truck easy. The **different axle configurations**, main deck widths, lengths and heights along with the ability to add a **booster**, provide superior versatility.



XL 120 HDE

### BUILT TO LAST

XL hydraulic necks are **wider and stronger** than the industry standard, offering increased stability for high center of gravity loads. The hydraulic support arm contacts truck frame rails only; there is **no need to carry a 4 x 4** for blocking the neck.



XL 100 CHDE

### PATENTED XL CHEATER NECK OPTION

The Patented XL Cheater Neck is a key component in many of XL Specialized Trailers' hydraulic units. The revolutionary design enables **trouble-free, efficient, fast hook-ups**. It boasts oversized donuts and tapered load pins for faster hook-ups on uneven ground.


### BUILT WITH YOU IN MIND

- Strong hydraulic neck
- 12' 5" gooseneck length
- 24' main deck
- 7 position variable ride height for hooking up at various heights
- 40" rear deck height
- 16" king pin setting
- 50' 5" overall length
- 108" swing clearance
- Prepped for booster
- All XL Specialized Trailers' products go through the new, premium paint process. XL paint includes a **full 1 year warranty**.
- Always striving to surpass market standards, all XL Specialized Trailers' products feature a **5 year structural warranty**.

**FIND YOUR SPECIALIZED SOLUTION TODAY**

visit [xlspecializedtrailer.com](http://xlspecializedtrailer.com)

# XL HYDRAULIC DETACHABLE GOOSENECK

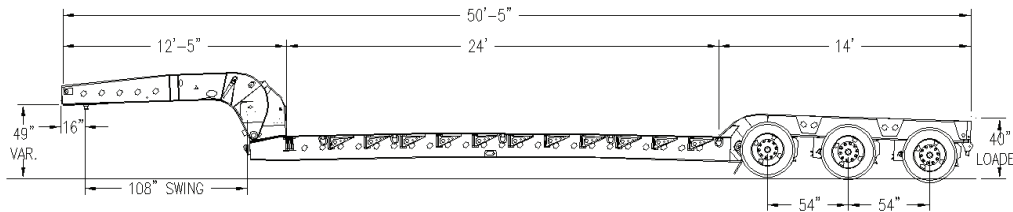

**XL110 HDG**  
CAPACITY: 110,000 LB OVERALL  
CONCENTRATED: 110,000 LB IN 10'  
OAL: 50' 5" | OAW: 102"

## SPECS

### GOOSENECK

HYDRAULIC DETACHABLE NARROW NECK  
12' 5" LONG  
APPROXIMATELY 35" TRAVEL UP/DOWN  
7 POSITION VARIABLE RIDE HEIGHT  
49" 5TH WHEEL HEIGHT  
108" SWING CLEARANCE  
16" KING PIN SETTING  
HYDRAULICS RUN OFF OF WET KIT  
AIR OPERATED LOCK W/ MANUAL  
SAFETY LATCH

### SUSPENSION

25,000 LB AIR RIDE  
MANUAL RIDE HEIGHT CONTROL

### AXLES

(3) 25,000 LB NOMINAL  
54" SPACING  
HUB PILOT, OUTBOARD DRUMS  
NO ABS, 2 SPRING BRAKES  
16½ X 7" BRAKES

### WHEELS AND TIRES

8.25 X 22.5 STEEL RIMS  
255 / 70R / 22.5 TIRES

### MAIN DECK

24' LONG  
T-1 FLANGE, 80K WEB  
24" LOADED DECK HEIGHT  
8" GROUND CLEARANCE  
(4) 16" FAB I-BEAMS  
(5) BENT D-RINGS PER SIDE  
10" AND 4" STUBBED JR. I-BEAM  
CROSS MEMBERS ON 12" ALT. CTRS  
1¾" APITONG DECKING RAISED  
CENTER DECK OPEN  
SWING OUT OUTRIGGERS WITH 24"  
CENTERS, DOUBLE AT FRONT

### REAR BRIDGE

14' LONG  
40" LOADED DECK HEIGHT  
OPEN WHEELS W/ BOLSTERS  
OPEN BOOM TROUGH  
(2) FLAG HOLDERS  
(2) BENT D-RINGS IN TAIL CHANNEL  
FRAME REINFORCEMENT FOR SINGLE  
AXLE BOOSTER

### LIGHTING

D.O.T. APPROVED 12V SEALED  
GROTE HARNESS  
RUBBER MOUNTED LED LIGHTS  
(1) MID-TURN SIGNAL PER SIDE  
(2) CLEARANCE LIGHT PER SIDE  
7 POLE ELECTRICAL SOCKET  
2 TAIL LIGHT PACKAGE WITH  
ALUMINUM COVER

### PAINT

1 YEAR WARRANTY  
BLACK, IH RED, OR NEW CAT YELLOW  
AIR & ELECTRIC DONE AFTER PAINT

### AVAILABLE MODELS

XL 70 HDG    XL 100 HDG  
XL 80 HDG    XL 110 HDG  
XL 90 HDG    XL 120 HDG  
ALL ALSO AVAILABLE WITH CHEATER  
NECK, CHDG

## OPTIONS



Removable swingout  
outriggers



XL 2 Axle Power Booster

### POPULAR OPTIONS

Full-width neck  
Patented XL Cheater Neck  
Detachable wheel area  
13 HP Self-contained  
power unit  
Dual hydraulic system

Jeeps, Flip Axles, Boosters  
Various outriggers/D-rings  
Covered boom trough  
Upper flange reinforcement  
Steel fenders for gooseneck  
Many more available