

XL HYDRAULIC FOLDING GOOSENECK



XL 110 Hydraulic Folding Gooseneck

YOUR SOLUTIONS-BASED HAULING PARTNER



XL 100 HFG

REVOLUTIONARY DESIGN

The XL Hydraulic Folding Gooseneck handles your heaviest hauling challenges. The **low incline ramp** makes it easy and safe to load and transport pavers, scrapers and other heavy equipment. The **neck adjusts to uneven terrain** without the use of blocks so you can load and unload almost anywhere.



XL 100 FFG: Pipeline Special

XL HFG: PIPELINE SPECIAL

The XL HFG: Pipeline Special is engineered to handle demanding off road applications. It features a **heavy-duty cross members, heavy-duty outriggers and top flange reinforcement.**



XL 80 HFG: Railroad Special

XL HFG: RAILROAD SPECIAL

The XL HFG: Railroad Special offers users a solution for hauling large, heavy equipment that requires heavy-duty ramps to load. It features a **57" gauge rail** (submerged in gooseneck and deck) and **8' pin on aluminum gooseneck ramps** with bolt on steel tips.


BUILT WITH YOU IN MIND

- Strong hydraulic neck
- 9' 8" gooseneck length
- 26' main deck
- Bucket well
- Low incline ramp
- 40" rear deck height
- 16" & 40" king pin settings
- 52' 3" overall length
- 106" & 82" swing clearance
- All XL Specialized Trailers' products go through the new, premium paint process. XL paint includes a **full 1 year warranty.**
- Always striving to surpass market standards, all XL Specialized Trailers' products feature a **5 year structural warranty.**

FIND YOUR SPECIALIZED SOLUTION TODAY

visit xlspecializedtrailer.com

XL HYDRAULIC FOLDING GOOSENECK

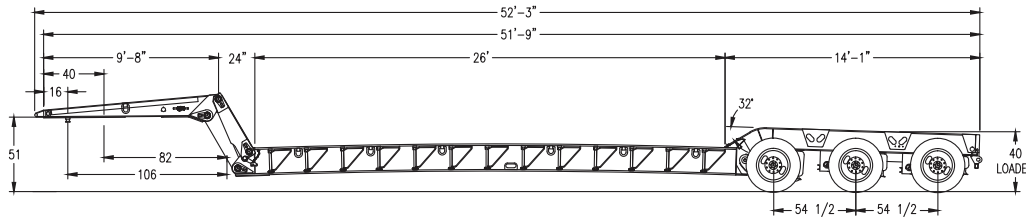

XL100 HFG

**CAPACITY: 100,000 LB OVERALL
CONCENTRATED: 100,000 LB IN 10'
OAL: 52' 3" | OAW: 102"**

SPECS

GOOSENECK

HYDRAULIC FOLDING
9' 8" LONG
16" & 40" KING PIN SETTING
106" & 82" SWING CLEARANCE
51" 5TH WHEEL HEIGHT
6" TAPERED NOSE WITH LIFT EYE
(1) D-RING PER SIDE
1 3/4" APITONG RAISED
7° LOAD ANGLE
UPPER FLANGE REINFORCEMENT
TOOL BOX BEHIND KING PIN

SUSPENSION

25,000 LB AIR RIDE
RAISE AND LOWER VALVE

REAR DECK

14' 1" LONG
40" LOADED DECK HEIGHT
(2) FLAG HOLDERS

HYDRAULICS

13 HP UNIT WITH CONTROL
ON DRIVER'S SIDE

MAIN DECK

26' LONG WITH BUCKET WELL
26" LOADED DECK HEIGHT
8" GROUND CLEARANCE
1 3/4" APITONG DECKING RAISED
CROSS MEMBERS DESIGNED FOR
CENTER LOADING
PERIMETER FRAME DESIGN 18" BEAMS
HEAVY DUTY REMOVABLE SWING OUT
REMOVABLE OUTRIGGERS
(6) D-RINGS PER SIDE
(2) FLAG HOLDERS AT FRONT

AXLES

(3) 25,000 NOMINAL, 77 1/2" TRACKING
54 1/2" AXLE SPACING
SPRING BRAKES ON 1 AXLE
16 1/2" X 7" BRAKES
HUB PILOT, OUTBOARD DRUMS
LIMIT CHAINS ON ALL AXLES

WHEELS AND TIRES

8.25 X 22.5 STEEL RIMS
255 / 70R / 22.5 TIRES

LIGHTING

D.O.T. APPROVED 12V SEALED
GROTE HARNESS
RUBBER MOUNTED LED LIGHTS
(1) MID-TURN SIGNAL PER SIDE
(2) CLEARANCE LIGHT PER SIDE
7 POLE ELECTRICAL SOCKET
2 TAIL LIGHT PACKAGE WITH
ALUMINUM COVER


PAINT

1 YEAR WARRANTY
BLACK, IH RED, OR NEW CAT YELLOW
AIR & ELECTRIC DONE AFTER

AVAILABLE MODELS

XL 100 HFG
XL 110 HFG
XL 120 HFG
OTHER CUSTOM CAPACITIES
AVAILABLE

OPTIONS



Tail roll



Upper flange reinforcement on main deck

POPULAR OPTIONS

Single drop conversion
Oil field spec with rollers
Winch in wheel area
Multiple king pin settings
13 HP self-contained or wet line
operated power unit

Upper flange reinforcement on
main deck
Dual hydraulic system
Prepped for Flip Axles,
Boosters and Power Boosters
Many more available