

## XL TILT TAG TRAILERS



XL 60 Tilt Tag

## YOUR SOLUTIONS-BASED HAULING PARTNER



### ULTIMATE VERSATILITY

XL Tilt Tags are available as a two or three axle, in **four capacities with a variety of deck lengths**. Choose the deck length that works for you. Add suspension options such as **air ride, a lift axle or a manual dump valve** for added versatility.



### TILT DECK ADVANTAGE

XL Tilt Tags offer easy loading and unloading without ramps. The deck has a  $12\frac{1}{2}^\circ$  load angle with a knife edge. **Small hydraulic cylinders** regulate the speed of the deck as it tilts up and and back to level. Use an XL Tilt Tag to haul small construction equipment and smaller loads of all kinds.



### FRONT END FEATURES

The **6' tongue** features a **4" head board** and an **adjustable pintle hitch** which goes from  $20\frac{1}{2}$  inches to  $31\frac{1}{2}$  inches. **Dual landing gear, safety chains and a toolbox in the tongue** are standard. For additional flexibility, add a gooseneck with kingpin or with  $2\frac{3}{4}$ " ball hitch.


### BUILT WITH YOU IN MIND

- Available in four capacities; 24,000 lbs; 40,000 lbs; 50,000 lbs; 60,000 lbs
- 11 D-rings per side
- T-1 flange, 80K web
- 8" channel side rails
- 3" channel crossmembers on 16" centers are standard, or upgrade to 4" JR. I-beams
- Main frame pierced beams
- Formed step on front of deck
- $12\frac{1}{2}^\circ$  load angle
- 2 tail light package
- Sealed wiring harness
- XL paint includes a full **1 year warranty**
- XL Tilt Tags feature a **1 year structural warranty**

### FIND YOUR SPECIALIZED SOLUTION TODAY


visit [xlspecializedtrailer.com](http://xlspecializedtrailer.com)

## XL 40, 50 & 60 TILT TAG: STANDARD SPEC

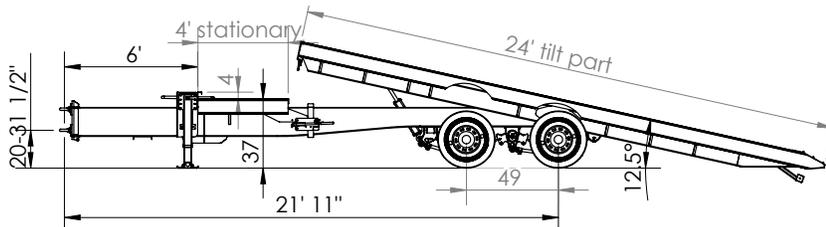


### XL 40 TILT TAG

CAPACITY: 40,000 LB OVERALL  
OAL: 34' - 39' | OAW: 102"

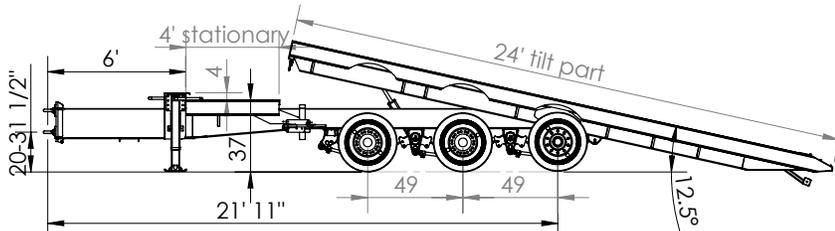

### XL 50 TILT TAG

CAPACITY: 50,000 LB OVERALL  
OAL: 34' - 39' | OAW: 102"

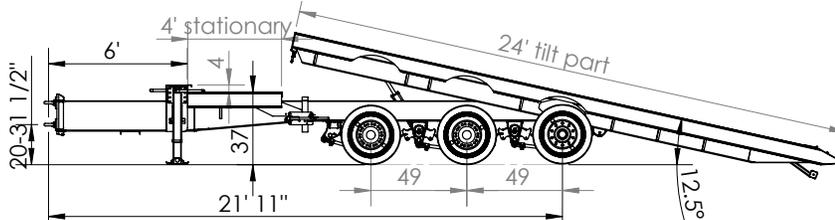

### XL 60 TILT TAG

CAPACITY: 60,000 LB OVERALL  
OAL: 34' - 39' | OAW: 102"

XL 24 TILT TAG ALSO AVAILABLE

#### PINTLE HITCH

6' TONGUE  
ADJUSTABLE PINTLE HITCH 20" - 31½"  
4" HEAD BOARD  
DUAL SPEED LANDING GEAR,  
140K STATIC, 100K LIFTING CAPACITY  
TOOLBOX IN TONGUE  
SAFETY CHAINS, GRADE 70

#### MAIN DECK

24' - 29' LONG  
37" LOADED DECK HEIGHT  
1⅝" RAISED OAK DECKING  
STEEL OVER WHEELS  
T-1 FLANGE, 80K WEB  
3" CHANNEL CROSSMEMBERS  
ON 16" CENTERS  
8" CHANNEL SIDE RAILS  
MAIN FRAME PIERCED BEAMS  
12½° LOAD ANGLE  
FORMED STEP ON FRONT OF DECK  
11 D-RINGS PER SIDE  
TOOLBOX ON CURBSIDE  
MUDFLAPS

#### SUSPENSION

SPRING/HUTCH H-9700

#### AXLES

40 TILT TAG: (2) 20,000 LB  
50, 60 TILT TAG: (3) 20,000 LB  
49" AXLE SPACING  
12¼" X 7½" BRAKES  
SPRING BRAKES ON 1 AXLE

#### WHEELS AND TIRES

17.5" STEEL RIMS  
235 / 70R / 17.5 TIRES

#### LIGHTING

SEALED WIRING HARNESS  
RUBBER MOUNTED LED LIGHTS  
2 TAIL LIGHT PACKAGE