


XL HYDRAULIC DETACHABLE EXTENDABLE



XL 90 Hydraulic Detachable Extendable

YOUR SOLUTIONS-BASED HAULING PARTNER

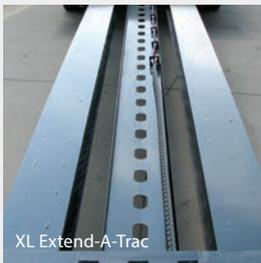

XL Extend-A-Trac

PATENTED XL EXTEND-A-TRAC

The XL Extend-A-Trac allows for extending and retracting the trailer without hooking and unhooking air and electrical lines. **6" greaseable rollers** incorporate oil impregnated bronze bushings to make extending easy. Improved **one-piece track pan design** adds stability.



standard main deck

FULLY EQUIPPED MAIN DECK

The XL 80 & 90 HDE deck is fully equipped for versatile hauling, with **(14) 1/2" chain drops per side**, **8 bent D-rings per side**, and **removable swingout outrigger brackets** on 24" centers. The rugged **Apitong decking** stands up to years of wear and tear.



XL 90 HDE with flip neck option

DESIGNED FOR YOU. BUILT TO LAST.

XL HDEs offer many user-friendly standard features. Choose 54" or 60" axle spacing, and add options to make your specialized extendable. These trailers feature double box beam construction, and are built using XL's **one-piece construction process** - resulting in stronger products.



BUILT WITH YOU IN MIND

- 48' overall length
- 28' 7" main deck extends to 49' 11" to handle extra long loads
- 7 position variable ride height for hooking up at various heights
- Extend-a-trac stops at every 2'
- 40" rear deck height
- 16" king pin setting
- 84" swing clearance
- 10' 5" gooseneck length
- Brackets for 36" flip neck
- I-beams and box beams are made from one piece web and flange and then welded on all sides.
- XL paint includes a **full 1 year warranty**.
- Always striving to surpass market standards, all XL Specialized Trailers' products feature a **5 year structural warranty**.

FIND YOUR SPECIALIZED SOLUTION TODAY

visit xlspecializedtrailer.com

XL 80 & 90 HDE: STANDARD SPECS

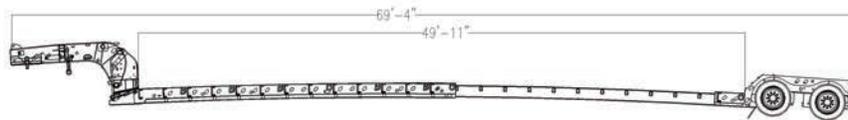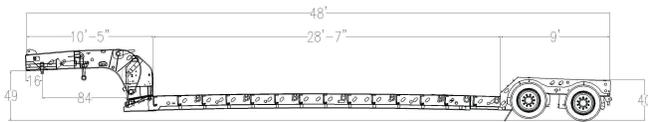

XL 80 HDE

CAPACITY: 80,000 LB OVERALL CLOSED
CONCENTRATED: 60,000 LB IN 10' CLOSED
OAL: 48' | OAW: 102"

XL 90 HDE

CAPACITY: 90,000 LB OVERALL CLOSED
CONCENTRATED: 70,000 LB IN 10' CLOSED
OAL: 48' | OAW: 102"

GOOSENECK

HYDRAULIC DETACHABLE (NARROW)
10' 5" LONG
49" 5TH WHEEL HEIGHT
84" SWING CLEARANCE
16" KING PIN SETTING W/ 3/8" PLATE
7 POSITION VARIABLE RIDE HEIGHT
HYDRAULICS RUN OFF WET KIT
AIR OPERATED LOCK WITH MANUAL
SAFETY LATCH
BRACKETS FOR 36" FLIP NECK

GOOSENECK OPTIONS

TOOLBOX IN REAR OF NECK W/ ALUM. DOOR
13HP HONDA UNIT, BASE OF NECK,
ALUM. COVER, DUAL HYDRAULICS
REGISTRATION HOLDER
36" FLIP NECK

REAR BRIDGE

54" AXLE SPACING: 9' LONG
60" AXLE SPACING: 9' 6" LONG
40" DECK HEIGHT
1 1/8" APITONG DECKING FLUSH
(2) FLAG HOLDERS
(2) STAKE POCKETS IN TAIL CHANNEL
(2) PAN STYLE D-RINGS PER SIDE, ON
CORNER
66" WIDE BUMPER AT REAR
80: FRAME REINFORCEMENT
FOR FLIP AXLE
90: FRAME REINFORCEMENT FOR
2 AXLE BOOSTER

REAR BRIDGE OPTIONS

1 PAIR CLEARANCE LIGHTS
PULL OUT LIGHTS
4" AMBER STROBE TAIL LIGHT
ADDITIONAL TAIL LIGHT
BATTERY BACK UP
(1) 4-WAY PLUG
1 3/8" APITONG DECKING - RAISED
DOCK BUMPERS

MAIN DECK

28' 7" - 49' 11" LONG
PATENTED EXTEND-A-TRAC
EXTENSION STOPS 24" ON CENTER
T-1 FLANGE, 80K WEB
(4) FAB I-BEAMS
20" LOADED DECK HEIGHT
6" GROUND CLEARANCE
FORMED CROSS MEMBERS
ON 12" CENTERS
(8) BENT D-RINGS PER SIDE
1 1/8" APITONG DECKING FLUSH,
CENTER COVERED
RAMP TAPERS TO 4"
(14) 1/2" CHAIN DROPS PER SIDE
REMOVABLE SWING OUT OUTRIGGER
BRACKETS ON 24" CENTERS
(2) FLAG HOLDERS AT FRONT
54" AXLE SPACING: 30" LONG MINI-DECK
60" AXLE SPACING: 24" LONG MINI-DECK

MAIN DECK OPTIONS

STORAGE COMPARTMENT IN REAR
OF MAIN DECK
REMOVABLE SWING OUT OUTRIGGERS
OAK OUTRIGGER PLANKS, 2" X 10"
1 3/8" APITONG DECKING - RAISED
ADDITIONAL CLEARANCE LIGHTS
4-WAY PLUGS

AXLES

(2) 25,000 LB NOMINAL
HUB PILOT, OUTBOARD DRUMS
452M ABS
1 6 1/2" X 7" BRAKES
(2) PAIR SPRING BRAKES

AXLE OPTIONS

PSI TIRE INFLATION SYSTEM
HUBOMETER
TP AXLES (SAME INNER & OUTER BEARINGS)
LIMIT STRAPS
DUST SHIELDS
CAM COVERS

WHEELS & TIRES

8.25 X 22.5 STEEL RIMS
255 / 70R / 22.5 TIRES

WHEEL AND TIRE OPTIONS

ALUMINUM MILL WHEELS
ALUMINUM POLISHED WHEELS
ALUMINUM DURABRIGHT WHEELS
MICHELIN 255/70R/22.5 TIRES
GOODYEAR 275/70R/22.5 TIRE
(41" REAR BRIDGE)

SUSPENSION

25,000 LB AIR RIDE
RAISE AND LOWER VALVE
MANUAL RIDE HEIGHT CONTROL

SUSPENSION OPTIONS

LIQUID FILLED AIR GAUGE
AIR WEIGH DIGITAL SCALE

LIGHTING

D.O.T. APPROVED 12V SEALED
GROTE HARNESSES
RUBBER MOUNTED LED LIGHTS
2 TAIL LIGHT PACKAGE WITH
ALUMINUM COVER

PAINT

1 YEAR WARRANTY
BLACK, IH RED, OR NEW CAT YELLOW
AIR & ELECTRIC DONE AFTER PAINT

PAINT OPTIONS

NON-STANDARD PAINT COLORS
NON-STANDARD METALLIC PAINT

AVAILABLE MODELS

XL 80 HDE
XL 90 HDE

OTHER CUSTOM CAPACITIES AND
OPTIONS ALSO AVAILABLE,
ASK YOUR SALES REP FOR DETAILS

STANDARD FEATURES VARY WITH CUSTOM HDES