

Sullivan Palatek®




D185P3



D185P3



D185

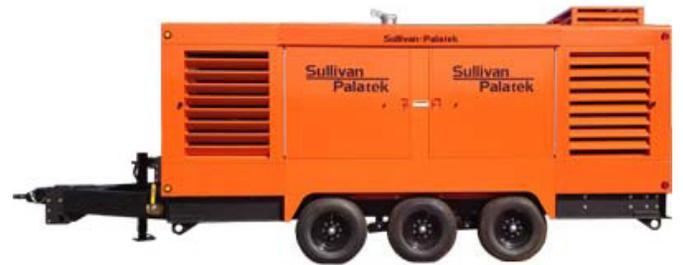

D750P



D375

The Ultimate Performance
Rotary Screw Air Compressor

Portable Compressors
Manufactured in the USA
185 cfm to 1800 cfm
John Deere, CAT and Cummins Engines
3 year Air End Warranty
Utility Models
Offshore Models

High Pressure Portable and Skid
950/350 to 1150/350

Instrument Quality Air
375H to 1600H
Skid Mount Aftercoolers
Skid Mount Dryers and Aftercoolers
Electric Construction Compressors

50 to 450 HP
Electronic Parts Orders through SmartEquip

Sullivan Palatek®

Sullivan Palatek offers a complete contractor line of pneumatic tools from Paving Breakers, Rock Drills, Busters, Diggers, Chippers and Tampers. These tools are based on tired and true working designs. Manufactured and Assembled in the USA!

BACKFILL TAMPER

The tamper cylinders are precision ground from alloy steel and have an internal oiler. They come with a 6" hollow cast iron butt and can be used with a variety of different optional tamping butts.

Model	Net Weight (lbs)	Bore (in)	Stroke (in)	Blows per Minute	Waranty
SBT-6	40.0	1.5	5.5	800	1 year



SBT-6

CHIPPING HAMMERS

The full line of 15 pound class Chippers can come with open handles with thumb triggers or heavy duty 4 bolt handles with external Thumb triggers or internal triggers. The open handle forged and is machined from high alloy steel with a shock, tool steel piston. The 4 bolt chipper is machined from high alloy steel and cast "D" handle with an easy to use Thumb or internal trigger. All are available with optional universal ball retainers. The 3" and 4" Thumb and Internal trigger 4 bolt chippers are available with Screw-On Universal Ball retainers. The light chipper is 11 pounds for easy overhead and light demolition work, has a stepped piston, cast handle with top mount trigger.

Model	Net Weight (lbs)	Bore (in)	Stroke (in)	Blows per Minute	Waranty
SCHO-2	13.0	1.125	2	2,300	1 year
SCHO-3	14.0	1.125	3	2,200	1 year
SCHO-4	15.0	1.125	4	1,800	1 year
SCH-2	13.0	1.125	2	2,300	1 year
SCH-3	14.0	1.125	3	2,200	1 year
SCH-4	15.0	1.125	4	1,800	1 year
SCH-11	11.0	1.125	2.375	2,550	1 year

CLAY DIGGERS

Available in two sizes: the 30 pound has the same rugged construction as the 30 pound breaker with the "D" handle with internal trigger. The 20 pound has a machined cylinder head with a cast "D" handle and thumb trigger.

Model	Net Weight (lbs)	Bore (in)	Stroke (in)	Blows per Minute	Waranty
SCD-30	30.0	1.75	3.375	1,550	1 year
SCD-20	19.0	1.418	2.75	1,560	1 year



SCD-20

PAVING BREAKERS

The line of paving breakers include 30, 40, 60 and 90 pound "T" handle tools, all with industry standard chuck sizes. They are all built from a proven market design, 4 bolt back threads, heavy duty side rod bolts and springs, forged alloy construction with removable chucks. Internal oilers on the 30, 60 and 90 pound breakers, 40 lb requires in line oiler.

Model	Net Weight (lbs)	Bore (in)	Stroke (in)	Blows per Minute	Waranty
SPB-90	92.5	2.625	6.0625	1,250	1 year
SPB-60	67.0	2.25	4.0937	1,400	1 year
SPB-40	42.0	1.73	5.75	900	1 year
SPB-30	34.0	1.75	3.375	1,550	1 year



SPB-60

Sullivan Palatek®

ROCK DRILLS

The Sullivan-Palatek line of drills are available in many weight sizes from 20-60 pounds and a large variety of chuck sizes. The SRD-75 is a heavy quarry drill suitable for drilling in granite and available in two chuck sizes. The SRD-55 is a quarry drill that can be used on high psi concrete it is a proven Toyo design and is available in 2 chuck sizes.

SRD-20



SRD-50



Model	Net Weight (lbs)	Bore (in)	Stroke (in)	Blows per Minute	Waranty
SRD-75	61.0	2.625	3.22	2,250	1 year
SRD-55	56.0	2.625	2.6875	1,650	1 year
SRD-50	51.0	3.0	2.0	2,300	1 year
SRD-30	29.0	2.4375	1.4375	2,700	1 year
SRD-20	16.5	1.9375	1.89	2,300	1 year

SPIKE DRIVERS

Railroad spike drivers are the same design as the standard paving breakers and have a special forged alloy striking dolly with an additional grease fitting for lower end lubrication. The SSD-60 is used on seasoned ties and the SSD-90 is for new or green ties.

SSD-60



SSD-90



Model	Net Weight (lbs)	Bore (in)	Stroke (in)	Blows per Minute	Waranty
SSD-90	89.5	2.625	6.0625	1,250	1 year
SSD-60	64.0	2.25	4.0937	1,400	1 year

Model	Net Weight (lbs)	Length (in)	Stroke (in)	CFM	Waranty
Air Cannon	5 lbs	48"	n/a	135	90 days