ISO 9001 Quality Management System | WBENC-Certified WBE | THE TRAILER *EXPERTS* ~ SINCE 1974

Product Sheet
Felling Trailers, Inc. 2021
www.felling.com • 1-800-245-2809

1525 Main Street South
Sauk Centre, MN 56378

FT-30-3 I-S DS			I-Series Drill
GVWR LBS: 33,850	**GAWR LBS: 10,000**	**WEIGHT LBS: 6,850**	**CAPACITY LBS: 27,000**

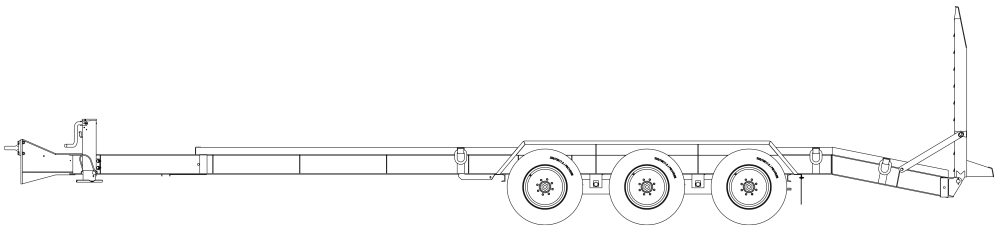

Feature Name	Standard Features	Std. Qty	UOM
Model	**FT-30-3 I-S DS**	1	
Load Capacity	27,000 lbs Distributed	1	Std
Frame Type	3" Angle Lip Up	1	Std
Frame Type	7" Deck Lip Extension Both Sides of Trailer, Ahead of Fenders	1	Std
Deck Type	White Oak 2" Nom	1	Std
Dovetail, Acc	(8) 1/2" x 1/2" x 4" Grouser Bars staggered on the outer angle iron and frame rail on each side of the Dovetail	8	Each
Ramps; Rear	6' x 16" Angle Iron Spring Assist	1	Pair
Ramps, Acc	Mount Ramps to Road Side ramps to measure 58" from outside of ramp to ramp with Hold-Up Anchor in Floor and Full Width Ramp Rod	1	Std
Appx Deck Height	28" Loaded, 30" Unloaded (Spring)	1	Inches
Width	102" OD, 82" ID	1	Std
Tie Downs	D-Rings, 1" Straight (2) 45° top of deck in corners, (2) front of fenders, (2) rear of deck, (2) 1/2 way on BVT - 5/8" (1) cent. on front of deck, (1) offset on BVT deck	10	Std
Brakes	Electric, FSA (Fwd Self Adj) On All Axles	1	Std
Axles	10K Oil Bath (Single Wheel)	3	Std
Suspension	Spring, 42" Spread	1	Std
Tires & Wheels	235/75R 17.5 J, 8 Bolt [17.5 x 6.75] Plate Wheel	6	Each
Hitch Length	Fixed 1.5' fabricated extension on a standard 5' A-Frame, adj. pintle approx. 18" to 30", middle position approx. 23"	6.5	Feet
Hitch Type	3" Adjustable Lunette Eye/Pintle, [C] 50,000 lb Plate Mount (5/8" Bolt)	1	Each
Jack	20K Spring loaded with a drop leg- single speed, outside of tongue road side, jack plate to pintle clearance aprox 30", clockwise to extend	1	Std
Lights	LED,4 tail light system, Sealed Wiring Harness	1	Std
Plug	7 Pole RV	1	Std
Trailer Color	Felling Black # CCA945378 (White Felling Decal)	1	Std
Standard	Drill Kit Ready - Steel Mounting Strips Under Deck To Mount Tank	1	Std
Standard	Center Fender Braces - From Outer Edge of the Fender Down to the Frame	1	Std
Standard	1/2" Safety Chains, Grade 70	1	Std
Standard	Document Holder	1	Std
GVWR	33,850 lbs	1	Std