

XL SLIDE AXLE



XL 80 Slide Axle (Slider)

YOUR SOLUTIONS-BASED HAULING PARTNER



XL 80 SA

SUPERIOR HYDRAULICS

The XL Slider features an extended dump angle of 17 degrees and improved hydraulics to keep your equipment from unnecessary wear. Hydraulic sliding axle assembly with traveling bumper provides under ride protection.



XL 110 SA

UNMATCHED EFFICIENCY

A 6½ degree load angle permits you to easily load pavers and rollers, while the winch at the front loads inoperable equipment. A single 2 stage cylinder provides maximum travel and minimal maintenance.



XL 80 SA

USER-FRIENDLY FEATURES

Haul forklifts with the durable 4-inch and 3" Jr. I-beam crossmembers on 8-inch centers. Enjoy new standard features: chain slots down the outer and center beams, a 2-function wireless remote, and Teflon coated rollers that do not need to be greased.


BUILT WITH YOU IN MIND

- Available in 48', 51' and 53' OAL
- California legal and R-tac legal specs available
- Chain drops down the outer beams and double chain drops down the center
- 17° dump angle
- Two speed landing gear
- 20,000 lb winch with 100' of ¾" cable comes standard
- Teflon coated rollers do not need to be greased
- 21" king pin setting
- 2 recessed cable rollers
- 10' 5" full-width upper deck
- All XL Specialized Trailers' products go through the new, premium paint process. XL paint includes a **full 1 year warranty.**
- XL Specialized Trailers' Slide Axle trailers feature a **5 year structural warranty.**

FIND YOUR SPECIALIZED SOLUTION TODAY

visit xlspecializedtrailer.com

XL SLIDE AXLE

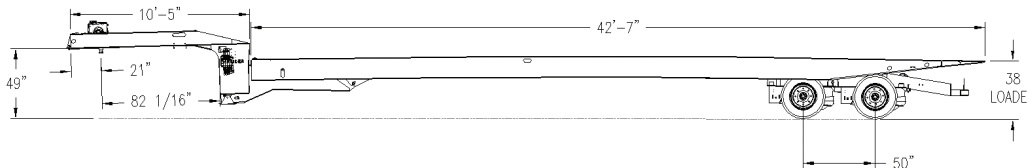

XL 80 SA
CAPACITY: 80,000 LB OVERALL
CONCENTRATED: 50,000 LB IN 10'
OAL: 48', 51' OR 53' | OAW: 102"

SPECS

UPPER DECK

- 10' 5" FULL WIDTH NECK
- 49" 5TH WHEEL HEIGHT
- 82" SWING CLEARANCE
- 21" KING PIN SETTING
- 1 3/8" RAISED APITONG DECKING
- 2 TOOL BOXES IN UPPER DECK WITH STEEL DOORS
- 1 RECESSED CABLE ROLLER, BACK OF NECK
- CHAIN DROPS ON 48" CENTERS, BOTH SIDES
- HYDRAULICS RUN OFF OF WET KIT
- HYDRAULIC CONTROL LEVERS
- 2 SPEED LANDING GEAR
- 20,000 HYDRAULIC WINCH WITH MANUAL KICKOUT, & 100' WITH 3/16" CABLE WITH LOOP, PLANETARY DRIVE
- 2 FUNCTION WIRELESS REMOTE

UPPER DECK OPTIONS

- 5TH WHEEL HEIGHT OTHER THAN 49"
- 28HP HONDA SELF-CONTAINED POWER UNIT WITH DUAL HYDRAULICS
- MARK V 2 SPEED LANDING GEAR
- HYDRAULIC PARK STANDS
- 15,000 LB HYDRAULIC PLANETARY DRIVE WINCH WITH 1/2" CABLE & LOOP
- 30,000 LB HYDRAULIC PLANETARY DRIVE WINCH WITH 3/16" CABLE & LOOP
- AIR KICKOUT FOR WINCH
- 6 FUNCTION WIRELESS WINCH REMOTE CONTROL
- 7 FUNCTION WIRELESS REMOTE, FOR USE WITH AIR KICKOUT OPTION
- 10 FUNCTION WIRELESS REMOTE, FOR USE WITH AIR KICKOUT & DOCK LEVELERS
- REGISTRATION HOLDER

SUSPENSION

- 25,000 LB AIR RIDE
- MANUAL DUMP VALVE

SUSPENSION OPTIONS

- LIQUID FILLED AIR GAUGE
- AIR WEIGH DIGITAL SCALE

MAIN DECK

- T-1 FLANGE, 80K WEB
- FAB I-BEAM (4 BEAM TRAILER)
- 38" LOADED DECK HEIGHT
- 1 RECESSED CABLE ROLLER IN FRONT
- 1 3/8" RAISED APITONG DECKING
- 4" JR. I-BEAM & 3" I-BEAM ON 8" CTRS
- CHAIN DROPS ON 24" CENTERS, EACH SIDE
- DOUBLE CHAIN DROPS DOWN THE CENTER
- ENERGY CHAIN TO PROTECT AIR, ELECTRIC, AND HYDRAULIC LINES
- 6 1/2° LOAD ANGLE
- 48' OAL: 17° DUMP ANGLE
- 51' OAL: 16° DUMP ANGLE
- 53' OAL: 15° DUMP ANGLE

MAIN DECK OPTIONS

- 9" WIDE
- 10" WIDE
- DOCK LEVELERS
- STAKE POCKETS ALT. W/ CHAIN SLOTS ON 12" CENTERS, OUTER BEAMS
- ADDITIONAL BENT D-RINGS
- PAN-STYLE D-RINGS
- DROP DOWN D-RINGS
- AMBER STROBE AS THIRD TAILLIGHT

WHEELS AND TIRES

- 6.75 X 17.5 STEEL RIMS
- 245 / 70R / 17.5 TIRES

WHEELS AND TIRE OPTIONS

- 235/75R/17.5 TIRES
- 245/70R/17.5 MICHELIN TIRES
- 255/70R/22.5 16PR RADIAL (DECK HEIGHT + 4.5")
- PSI TIRE INFLATION SYSTEM
- ALUMINUM MILL WHEELS
- ALUMINUM POLISHED WHEELS
- ALUMINUM DURABRIGHT WHEELS

AXLES

- (2) 25,000 LB NOMINAL
- 50" SPACING
- HUB PILOT, OUTBOARD DRUMS
- 12 1/4" X 7 1/2" BRAKES
- AUTO SLACK ADJUSTERS
- LIMIT CHAINS ON ALL AXLES
- 251M SPRING BRAKES ON 1 AXLE
- GREASELESS ROLLERS ON SLIDING AXLE ASSEMBLY

AXLE OPTIONS

- 60" AXLE SPACING
- CHASSIS UNI LUBE SYSTEM
- CAM COVERS
- HUBOMETER
- DUST SHIELDS
- SPRING BRAKES ON 2ND AXLE

LIGHTING

- D.O.T. APPROVED 12V SEALED GROTE HARNESS
- RUBBER MOUNTED LED LIGHTS
- (1) MID-TURN SIGNAL PER SIDE
- (2) CLEARANCE LIGHT PER SIDE
- 7 POLE ELECTRICAL SOCKET
- 2 TAIL LIGHT PACKAGE WITH ALUMINUM COVER

PAINT

- 1 YEAR WARRANTY
- BLACK, IH RED, OR NEW CAT YELLOW
- AIR & ELECTRIC DONE AFTER PAINT

AVAILABLE MODELS

- XL 80 SA
- XL 80 SA: CALIFORNIA LEGAL
- XL 80 SA: R-TAC LEGAL
- XL 110 SA

OTHER CUSTOM CAPACITIES AND OPTIONS ALSO AVAILABLE, ASK YOUR SALES REP FOR DETAILS