

## XL STEP DECK : T-SERIES



XL 60 Step Deck

## YOUR SOLUTIONS-BASED HAULING PARTNER



### VERSATILE AXLE OPTIONS

The XL SD: T-Series is available with **four axle-spread options**: 49-inch (with spring suspension only), 54-inch, 60-inch or 10-foot 1-inch. Choose from the standard 40 inches loaded deck height, or go to 17.5 tires for a loaded deck height of 36 inches.



### BEAVER TAIL

The XL SD: T-Series features a 6-foot long beaver tail with 5-foot 8-inch spring assist ramps. Use the beaver tail and ramps to load equipment faster. Add wood to your ramps for added strength and traction. A third center deck option is also available to add to your beaver tail.



### BUILT TO LAST

Built with **T-1 flange and 80K web**, the XL Step Deck is a built to last. **1½-inch flush apitong** decking holds up to years of heavy use. 3-inch channel crossmembers on 16-inch centers come standard.


### BUILT WITH YOU IN MIND

- Available in 48-foot or 53-foot overall length
- T-1 flange, 80K web
- 2 speed landing gear
- 48" fifth wheel height
- Stake pockets on 24" centers
- ¾" X 2" rub rail with single pipe spools
- Knee braces on 48" centers
- Standard Apitong decking is stronger than Oak
- Mill channel side rails
- 53' version is available with or without a 6' beavertail
- XL paint includes a full 1 year warranty
- XL's SD: T-series feature a 1 year structural warranty

### FIND YOUR SPECIALIZED SOLUTION TODAY

visit [xlspecializedtrailer.com](http://xlspecializedtrailer.com)

## XL 60 STEP DECK T-SERIES: STANDARD SPEC

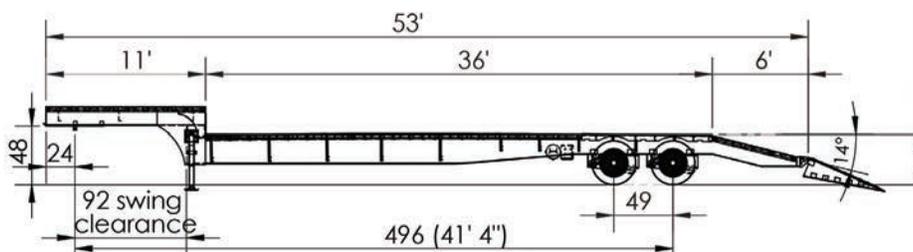

**XL 60 STEP DECK**  
CAPACITY: 60,000 LB OVERALL  
OAL: 53' | OAW: 102"

### GOOSENECK

11' LONG  
24" KING PIN SETTING & 86" SWING  
48" FIFTH WHEEL HEIGHT  
1½" APITONG DECKING  
2 SPEED LANDING GEAR  
STAKE POCKETS ON 24" CENTERS  
¾" X 2" RUB RAIL WITH  
SINGLE PIPE SPOOLS

### MAIN DECK

36' LONG  
T-1 FLANGE, 80K WEB  
40" LOADED DECK HEIGHT  
1½" APITONG DECKING FLUSH  
3" CHANNEL CROSSMEMBERS  
ON 16" CENTERS  
MILL CHANNEL SIDE BEAMS  
STAKE POCKETS ON 24" CENTERS  
¾" X 2" RUB RAIL WITH  
SINGLE PIPE SPOOLS  
KNEE BRACES ON 48" CENTERS  
(2) TOOL BOXES 12" X 12" X 48"  
6' BEAVER TAIL  
5' 8" SPRING ASSIST RAMPS

### DECK OPTIONS

NO BEAVERTAIL  
ALUMINUM TOOLBOX 18" X 18" X 48"  
TRACTION OVER WHEELS  
ADDITIONAL 2" SIDE CLEARANCE LIGHTS  
AMBER STROBE TAIL LIGHTS  
SLIDING WINCH TRACK, DRIVERSIDE  
SLIDING WINCH TRACK, CURBSIDE  
SLIDING WINCHES, DRIVERSIDE  
MANUAL DUMP VALVE  
WOOD ON RAMPS  
(ONLY AVAILABLE WITH BEAVER TAIL)  
3RD LOAD RAMP  
(ONLY AVAILABLE WITH BEAVER TAIL)  
4" I-BEAMS IN LIEU OF 3" CHANNEL  
C-CHANNEL ON RAMPS  
FORMED STEP ON FRONT

### SUSPENSION

AIR RIDE/RIDEWELL

### AXLES

(2) 25,000 LB DEXTER  
77½" TRACKING  
2S1M SPRING BRAKES ON 1 AXLE  
16½" X 7" BRAKES  
HUB PILOT, OUTBOARD DRUMS

### AXLE OPTIONS

49" AXLE SPACING  
54" AXLE SPACING  
60" AXLE SPACING  
10' 1" AXLE SPACING  
PSI TIRE INFLATION SYSTEM

### WHEELS AND TIRES

8.25 X 22.5 STEEL RIMS  
255 / 70R / 22.5 TIRES

### WHEEL AND TIRE OPTIONS

WELD-ON MOUNT FOR SPARE TIRE  
BOLT-ON MOUNT FOR SPARE TIRE  
ALUMINUM WHEELS (INSIDE)  
ALUMINUM WHEELS (OUTSIDE)  
235/70R/17.5 TIRES (36" DECK HEIGHT)  
CUSTOMER SUPPLIED MUDFLAPS  
SPARE 255 TIRE AND STEEL WHEEL  
SPARE 235 TIRE AND STEEL WHEEL

### LIGHTING

SEALED WIRING HARNESS  
RUBBER MOUNTED LED LIGHTS  
2 TAIL LIGHT PACKAGE

### PAINT

FULL 1 YEAR WARRANTY  
BLACK, RED, OR NEW CAT YELLOW  
AIR & ELECTRIC DONE AFTER PAINT

### PAINT OPTIONS

NON-STANDARD PAINT COLORS  
NON-STANDARD METALLIC PAINT

### AVAILABLE MODELS

XL 60 SD  
XL 80 SD